



## Betonschraube Typ MULTI-MONTI®-plus P


DE - Montagekennwerte  
 UK - Installation parameters  
 FR - Caractéristiques de montage  
 NL - Kengetallen voor montage  
 ES - Coeficientes de montaje  
 HU - Szerelési jellemzők  
 CZ - Montážní parametry

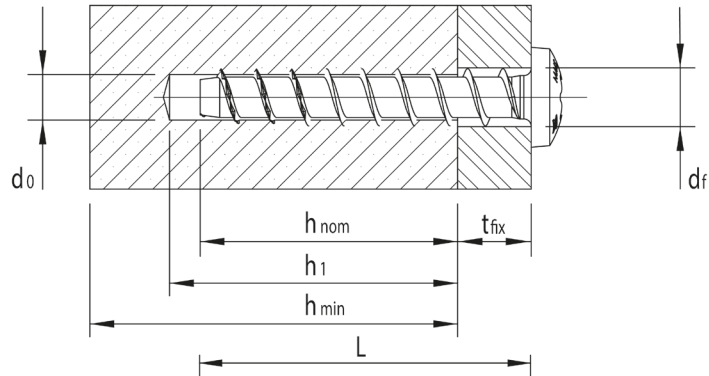


**MÜPRO** GmbH  
 Hessenstraße 11  
 65719 Hofheim-Wallau  
 Deutschland  
 Tel.: +49 (61 22) 80 80  
 Fax: +49 (61 22) 47 02  
[www.muepro.de](http://www.muepro.de)

## Betonschraube Typ MULTI-MONTI®-plus P

DE - Montagekennwerte  
 UK - Installation parameters  
 FR - Caractéristiques de montage  
 NL - Kengetallen voor montage  
 ES - Coeficientes de montaje  
 HU - Szerelési jellemzők  
 CZ - Montážní parametry

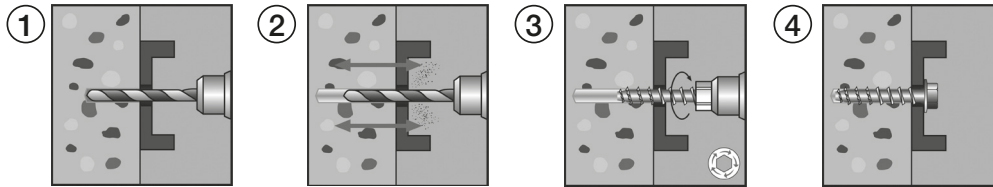

	Zulassung/ approval	L	t <sub>fix</sub>	T-DRIVE	d <sub>f</sub>	h <sub>1</sub>	Ø d <sub>0</sub>	h <sub>nom</sub>	T <sub>inst</sub>
		[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[Nm]
MMS-plus P 7,5x40 / 5	ETA-15/0784	40	5	T-30	9	40	6	35	20
MMS-plus P 7,5x50 / 15	ETA-15/0784	50	15			40		35	
MMS-plus P 7,5x60 5 / 25	ETA-15/0784	60	5 25			40 65		35 55	



**MÜPRO** GmbH  
 Hessenstraße 11  
 65719 Hofheim-Wallau  
 Deutschland  
 Tel.: +49 (61 22) 80 80  
 Fax: +49 (61 22) 47 02  
 www.muepro.de

DE Bei kritischen Schraubfällen (Bewehrungskontakt) maximales Anzugsdrehmoment beachten/  
 UK The maximum tightening torque must be observed in critical screwing cases (reinforcement)